



SHOCK LINE INSTRUCTIONS

- 1) Push line through the double metal sleeve to open a loop, on end ("B").
- 2) Enter the shock line loop on the shock line groove and tighten.
- 3) Tie the end ("A") to any convenience place toward to the bow.

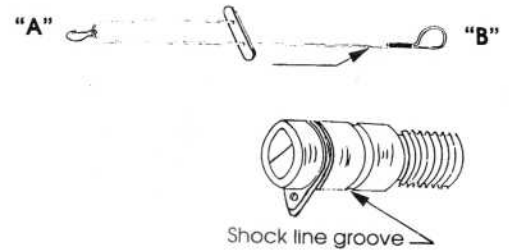

SUGGESTED PLACEMENT, USING 4 ROD HOLDERS

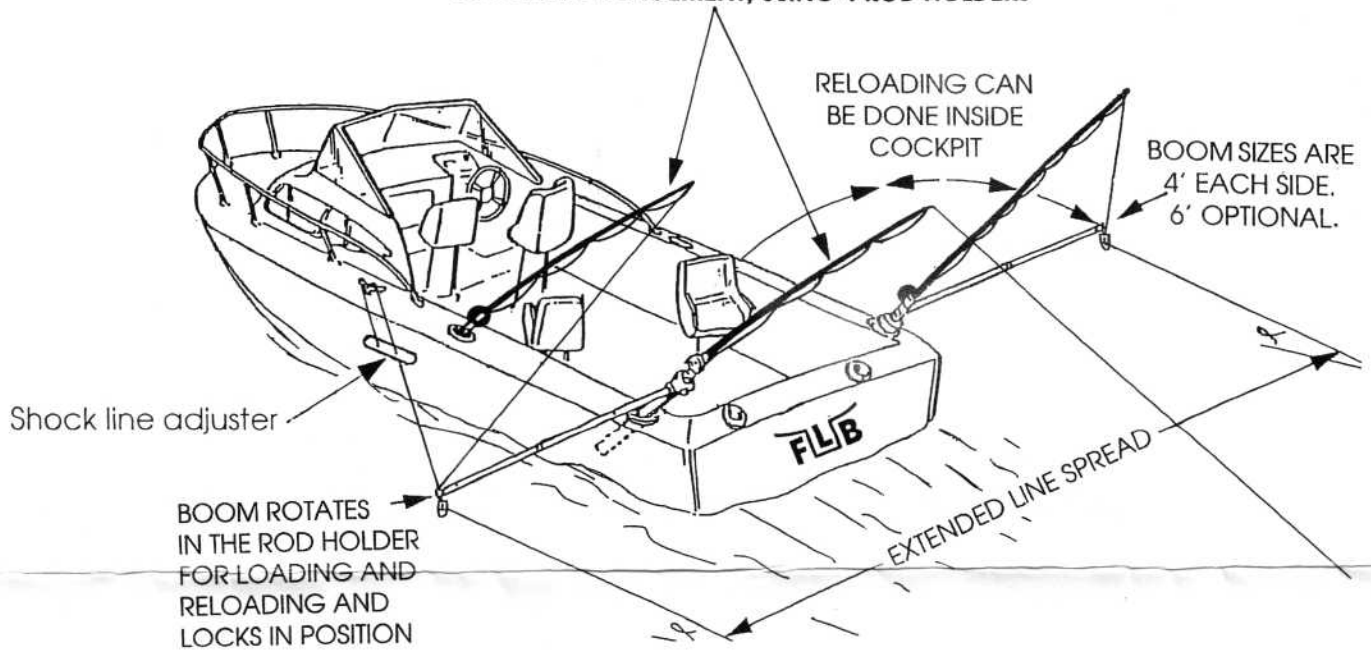

A FEW TIPS FROM THE DEVELOPER

Tangles - Ugh! For years, fishermen have been trying to invent a way to overcome this dilemma. I think the Flat Line Boom system is the best answer. We have tested the Booms on the rivers, lakes, and oceans. We have caught Snook, Walleys, Pike, Bass, and all the ocean species. **MOST TANGLES HAPPEN WHEN TRYING TO RETURN TO THE SCHOOL OF FISH.**

Trolling:

1. When making a quick turn to return to the fishing location, **rotate the Boom to the inside of the turn, pointing it to the bow of the boat.** This maintains the best possible spread.
2. The Boom permits you to locate the baits outside the prop wash. Now you can locate them on the face of your boat's wake. (This one comes from Hawaii). **Locating your baits on the face of the 3rd, 5th, or 7th of the boat's wake will improve your catch. Use the shock-line to fine tune your bait location.**

Drift & Bottom Fishing:

1. Drift Fishing - Unlock the Boom from the drift side rod holder and, using the sock line, position the Boom parallel to your drift. Will allow more lines fishing.
2. Bottom Fishing at anchor - Use the Booms to spread baits, enabling you to launch more lines from the transom.

To store your Booms for travel, reverse the booms into opposite rod holders.

I hope these tips are useful and should you develop other applications when using our Booms, Please pass it on so we can share it with others. Send us a letter or E-mail to us.


Thank you for choosing our Outrigger,

FLB[®] FLAT LINE BOOM, MFG.

MODEL # 3537

- 1) Assemble all the parts as shown on the PARTS AND PACKING LIST.
- 2) Check & Insert lock tubes into your rod holder. NOTE: Most metal gunnel mounted rod holders are compatible with this system. On the smaller rod holders you will need to remove the rubber sleeve.
- 3) If you are using the optional extensions for an increase in your spread, you must use the Shock lines to protect the Booms and your rod holder pin.
- 4) A few rod holders have a closed bottom. To use this product you can switch the lock tubes to opposed sides and use the shock line to position the booms.
- 5) See shock line instructions.
- 6) Check all connections for tightness. If there is not a storage problem, for safety, we suggest that locktite or nail polish be used on the release end screw and the booms threads except at the lock tube.

ASSEMBLY, PARTS & PACKING LIST

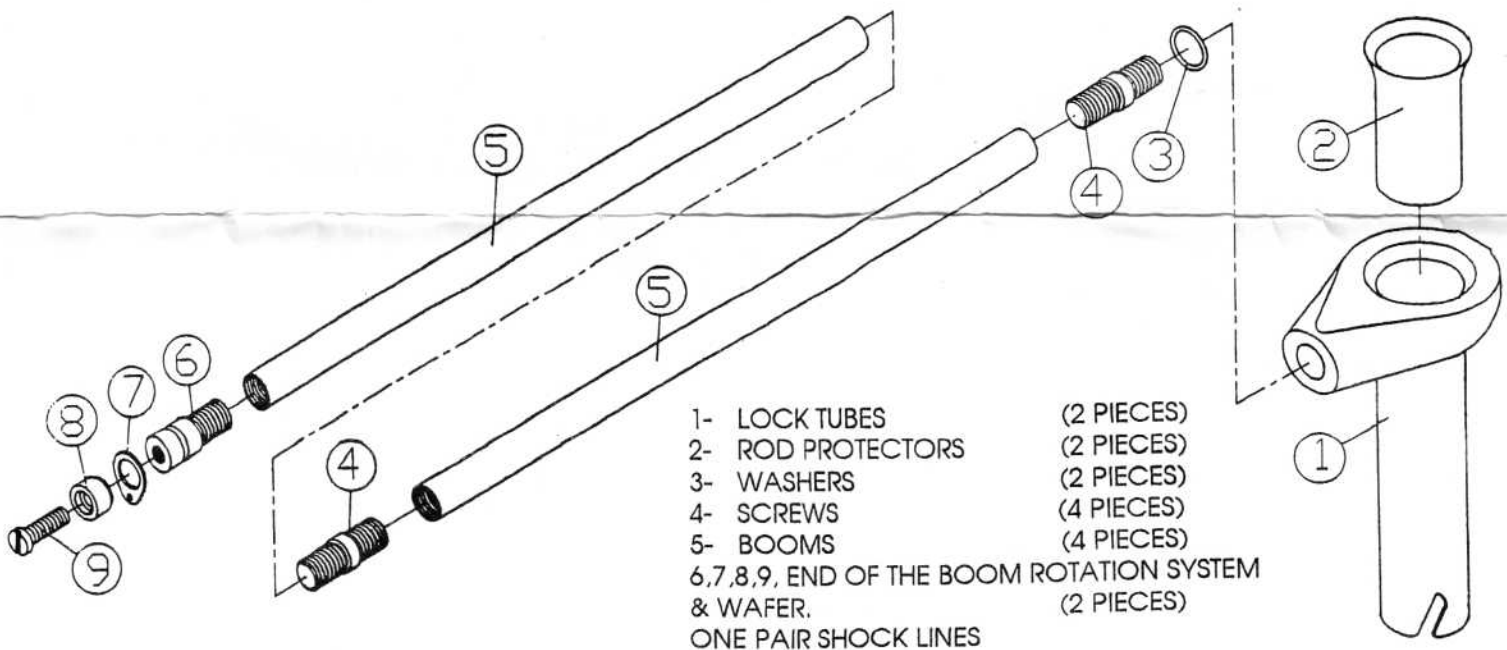

ONE YEAR LIMITED WARRANTY AGAINST MANUFACTURING DEFECTS AND WORKMANSHIP

The Manufacturer is not responsible for the use of this product, other than its intent as an extension boom to release a fishing line from a release system requiring 15 pounds or less to release the fish line, unless the shock line system is in place. Shock line is included in this package for your convenience.

U.S. Utility Patent # 5,301,451 ISSUED 4/12/1994. – Canadian Patent # 2,133,915 issued 10/18/96.

Taiwan Patent # 135,672 issued 7/19/98.

International Patent, Class 028, Reg. # 2,161,533. S/N 75-212,110